



Lakelands Concrete Products, Inc.
 7520 East Main St., Lima, NY 14485
 Phone: 585-624-1990, Fax: 585-624-2102

Web: www.lakelandsconcrete.com
 E-mail: sales@lakelandsconcrete.com

Date: 4/28/11

DWG: ST-All

Low-Profile Septic Tank Dual Compartment

Lakelands Concrete Products Septic Tank Advantages:

- Low-Profile Tank - Less Digging
- Monolithic Tank - No Leakage / No Joints
- Multi-Inlet Optional

Specifications:

Design Criteria: 5000 Psi @28 Days

Entrained Air: 5% - 9%


Design Loading: 300 PSF

Reinforcement: BAR-ASTM A615 GR60

WWR-ASTM A185/A497 GR65

Meets N.Y.S.D.O.H. 10NYCRR Appendix 75-A

Note: Lakelands Concrete Septic Tanks Do Not Require Water Testing Per N.Y.S.D.O.H. 10NYCRR Appendix 75-A. Any Tank With Joints Below The Waterline Requires The Contractor To Test Prior To Backfilling. (75-A.6(Septic Tank).b.3.iii)

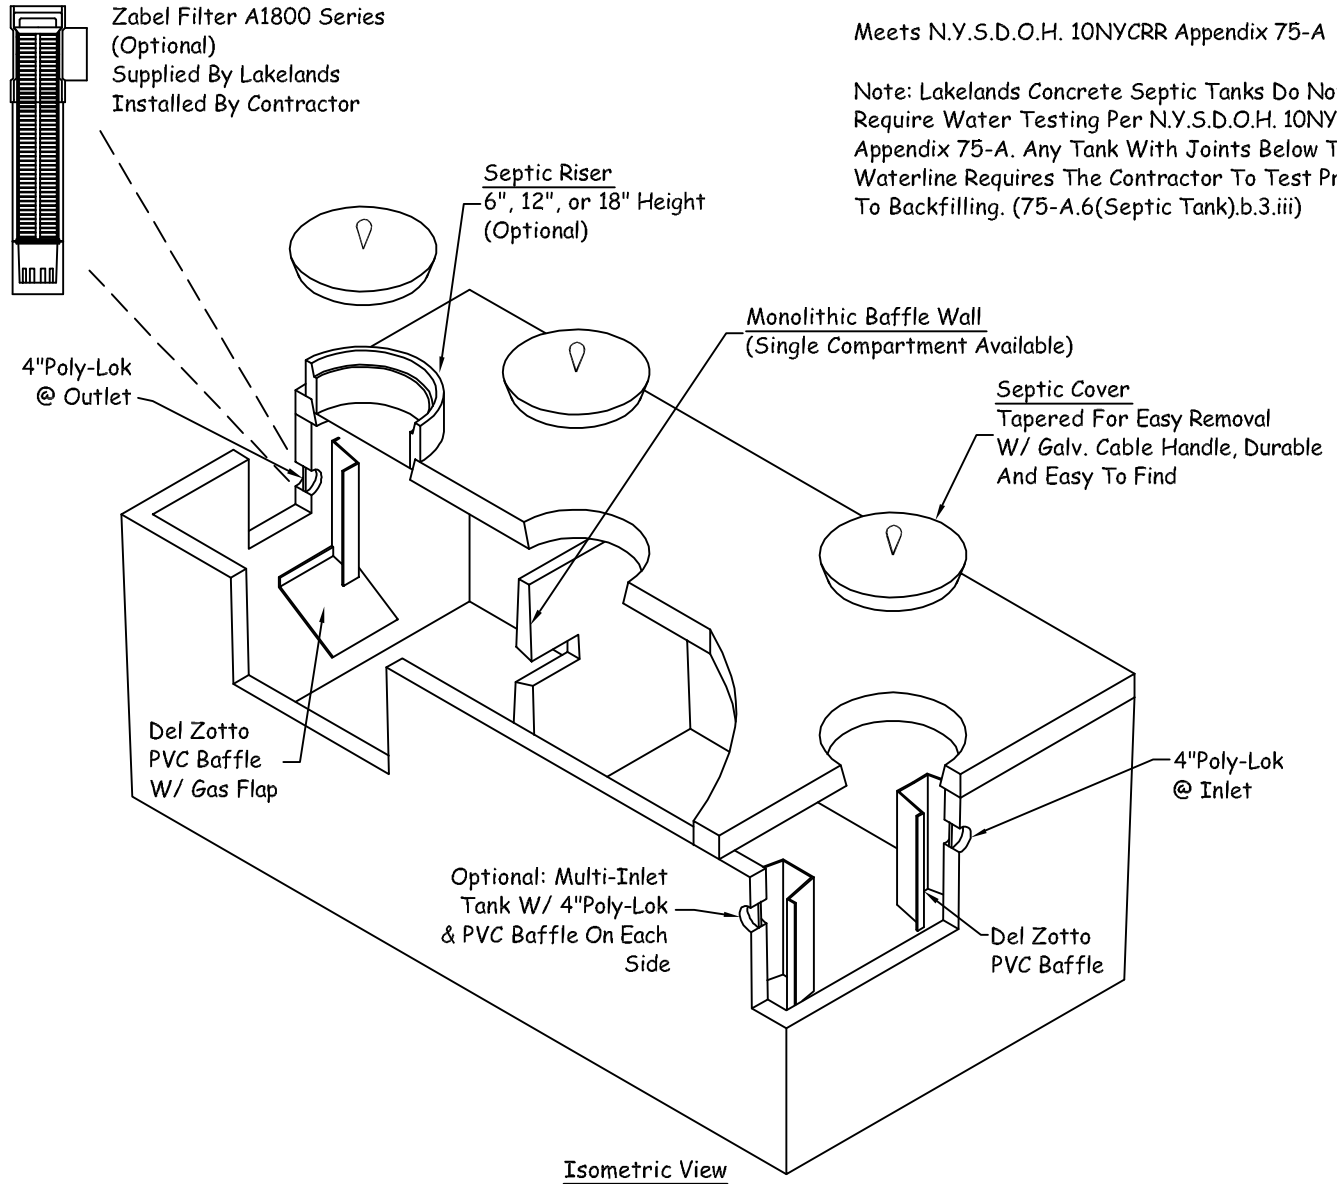

Lakelands Can Set All Septic Tanks, As Long As We Can Get Within 15'-0" Of Opening.

Warning: Septic Tanks Are NOT Holding Tanks, If Empty For A Period Of Time The Ground Water Force Could Damage The Tank.

Lakelands Is Not Responsible For Excessive Coverage Depth Or In Traffic Loading Areas. (Heavy Duty Tanks Available, Call For Pricing)

Septic Tank	Length (OD)	Width (OD)	Length (ID)	Width (ID)	Height (OD)	Inlet From Bottom	Outlet From Bottom	Baffle Height	Baffle Width	Weight
ST1000D	128"	67"	122"	61"	51"	38"	35"	38"	61"	10,415 LBS
ST1250D	129"	68"	123"	62"	59"	46"	43"	46"	62"	11,435 LBS
ST1500D	130"	68"	124"	62"	67"	54"	51"	54"	62"	12,500 LBS