




Lakelands Concrete Products, Inc.  
7520 East Main St., Lima, NY 14485  
Phone: 585-624-1990, Fax: 585-624-2102

Web: [www.lakelandsconcrete.com](http://www.lakelandsconcrete.com)  
E-mail: [sales@lakelandsconcrete.com](mailto:sales@lakelandsconcrete.com)

Date: 2/2/01

DWG: MH616

Manhole  
6'-0" x 16'-0"

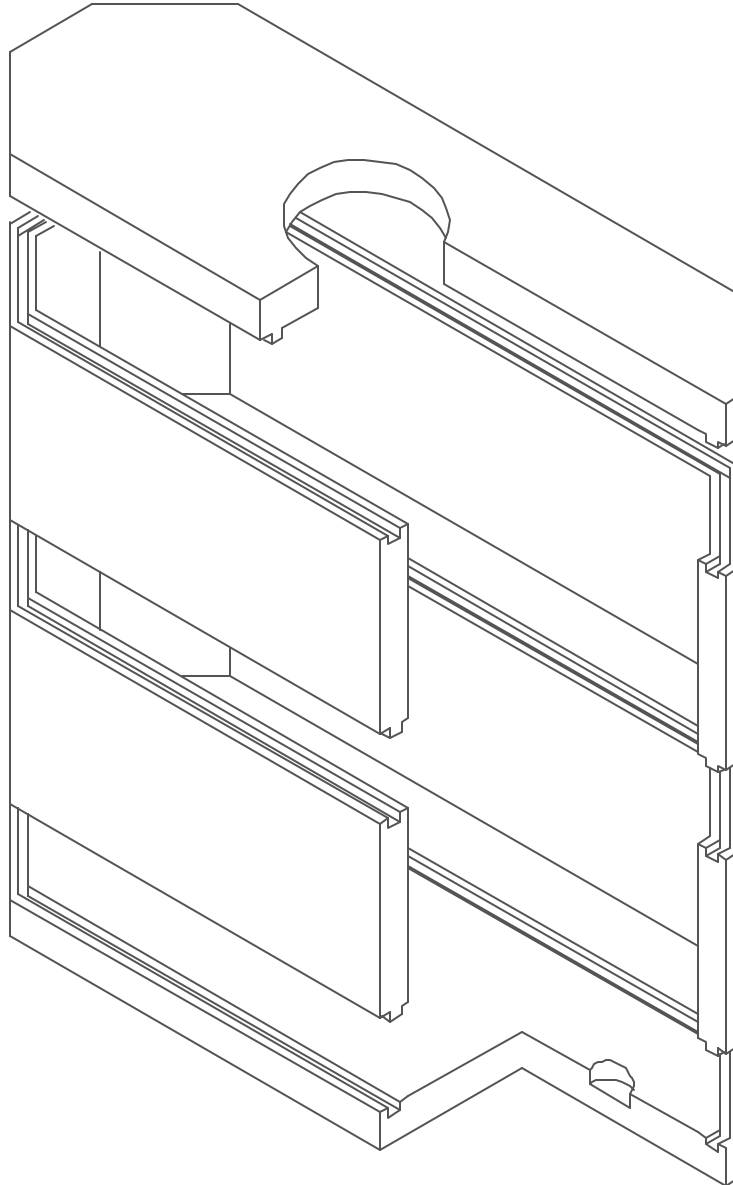




Lakelands Concrete Products, Inc.  
 7520 East Main St., Lima, NY 14485  
 Phone: 585-624-1990, Fax: 585-624-2102

Web: www.lakelandsconcrete.com  
 E-mail: sales@lakelandsconcrete.com

Date: 2/2/01

DWG: MH616

Manhole  
 6' -0" x 16' -0"

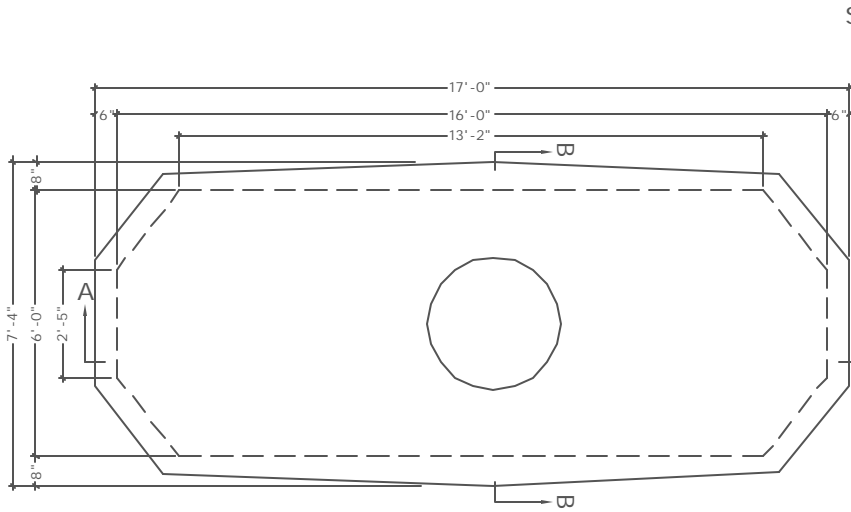


PLAN VIEW

Specifications:


Concrete: 5000psi @ 28 Days  
 Entrained Air: 5% - 9%  
 Design Load: AASHTO HS20  
 Reinforcing: fy= 60,000psi ASTM A615

Notes:

- \*Concrete Cover Available With Various Size Openings
- \*Various Size Knockouts Or Openings As Required
- \*Cast Iron Frame And Covers Available

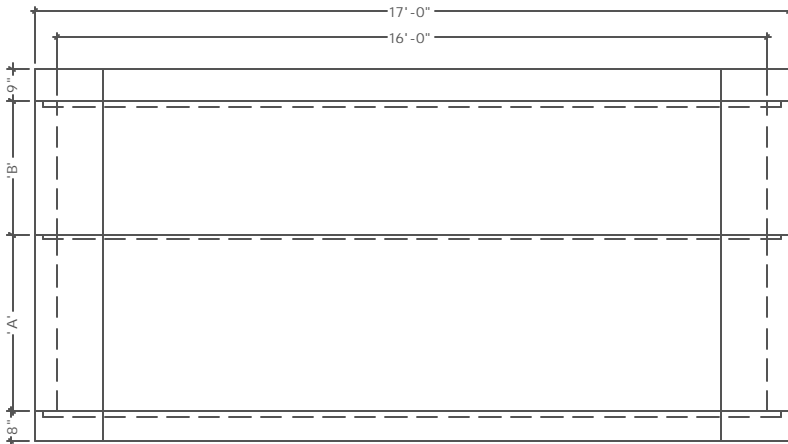

SECTION VIEW 'A'

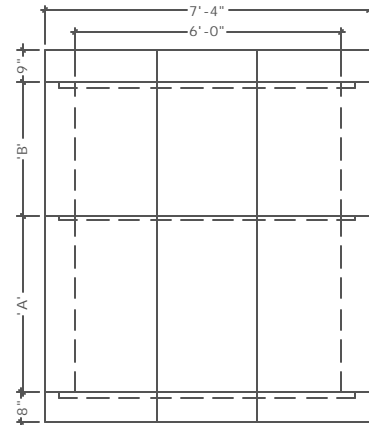

SECTION VIEW 'B'

Model No.	A	B	*Height		Weights	Model No.	A	B	*Height		Weights
			Inside	Outside					Inside	Outside	
MH6166	36"	36"	6'-0"	7'-5"	45,750#	MH6168	48"	48"	8'-0"	9'-5"	52,950#
MH61666	42"	36"	6'-6"	7'-11"	47,250#						
MH6167	42"	42"	7'-0"	8'-5"	48,750#	* Additional Heights Available Per Customer Specifications				Cover	12,150#
MH61676	48"	42"	7'-6"	8'-11"	50,850#					Base	10,800#